

Turntide Axial Flux Motor AF130

The Turntide Axial Flux Motor 130 (AF130) offers exceptional power density, with one of the highest peak power ratings, in its class, at up to 9.3 kW/kg at 800V_{DC}.

With a peak efficiency of up to 95%, the AF130 is well-suited for high-performance demand in a compact space claim. It offers smooth, quiet operation with low torque ripple while supporting inverter supply voltages of up to 850V_{DC}.



Features

- 3-phase connection for easy interfacing with current inverter technology
- Short and compact motor length
- Customisation options for the top box and coolant port orientation
- Low cogging and low ripple torque give smooth, quiet operation in direct drive applications
- Compact design with flat front and back faces for mounting
- IP67-rated shaft seals (optional)
- Low inertia composite rotor with excellent dynamic stability
- Suitable for inverter supply voltages up to 850V_{DC}
- Liquid cooling using water/glycol for enhanced performance
- Integrated PT100 winding temperature sensors
- Sin/Cos resolver for out-of-the-box compatibility with most commercially available inverters
- Offered in 3,4,5 and 6-turn arrangements, allowing standard offerings to meet the customer-specific torque requirements

Applications



TURNTIDE TECHNOLOGIES

Details are correct at time of publishing

Turntide Technologies designs and manufactures breakthrough electric motors, power electronics and energy storage solutions that optimize performance, reliability, and efficiency in all things that move.

Turntide Technologies, Eighth Avenue, Team Valley Trading Estate, Gateshead, NE11 0QA, UK

turntide.com | electrificationsales@turntide.com

TTN-MAN-006
V5.0 – 17/12/2024

Specification

Voltage Level (V_{DC})	360		800	
Motor Speed	3 turns	5 turns	3 turns	5 turns
Max Speed (rpm)	8000			
Peak Performance (20 seconds)				
Peak Torque (Nm)	342	352	342	352
Peak Power (kW)	144	91	284	219
Continuous Performance (60 mins)				
Maximum Continuous Torque (Nm)	133	135	133	135
Maximum Continuous Power (kW)	59	43	67	69
Maximum Continuous Current (Arms)	170			
Coolant Flow rate				
Recommended Coolant Flow (l/min)	8			
Environmental				
Coolant Temperature Range	-20°C to 85°C	Max Winding Temperature		Up to 170°C
Ambient Temperature Range	-20°C to 90°C	IP Rating		IP67, (with optional shaft seal)
Coolant Type	BS6580-1992 or equivalent			
Any temperature above 45°C ambient and 55°C coolant will require a derating in performance from the controller.				
Motor Data Interface				
Thermal interface (Located in the end windings)	2x PT100	Resolver	1x LTN RE-15-1-K68 Single pole pair	
Mass, Dimensions and Drawings				
Weight (kg)	30.5, Dry weight	Depth (mm)	110	
Diameter (mm)	338	Height (mm)	344	

LEFT SIDE PHASE CABLES AND COOLING PORTS

All dimensions are in mm

MOTOR MOUNTING (SHAFT SIDE)

An example shaft is shown for reference. Turntide offers a range of pre-defined shaft geometries (Spline, Key or Smooth). Contact us for more information.

Peak overvoltage support 1kV

TURNTIDE TECHNOLOGIES


Turntide Technologies designs and manufactures breakthrough electric motors, power electronics and energy storage solutions that optimize performance, reliability, and efficiency in all things that move.

Turntide Technologies, Eighth Avenue, Team Valley Trading Estate, Gateshead, NE11 0QA, UK

turntide.com | electrificationsales@turntide.com

Details are correct at time of publishing

Performance Data Examples
360V_{DC} - 700V_{DC} - 800V_{DC}

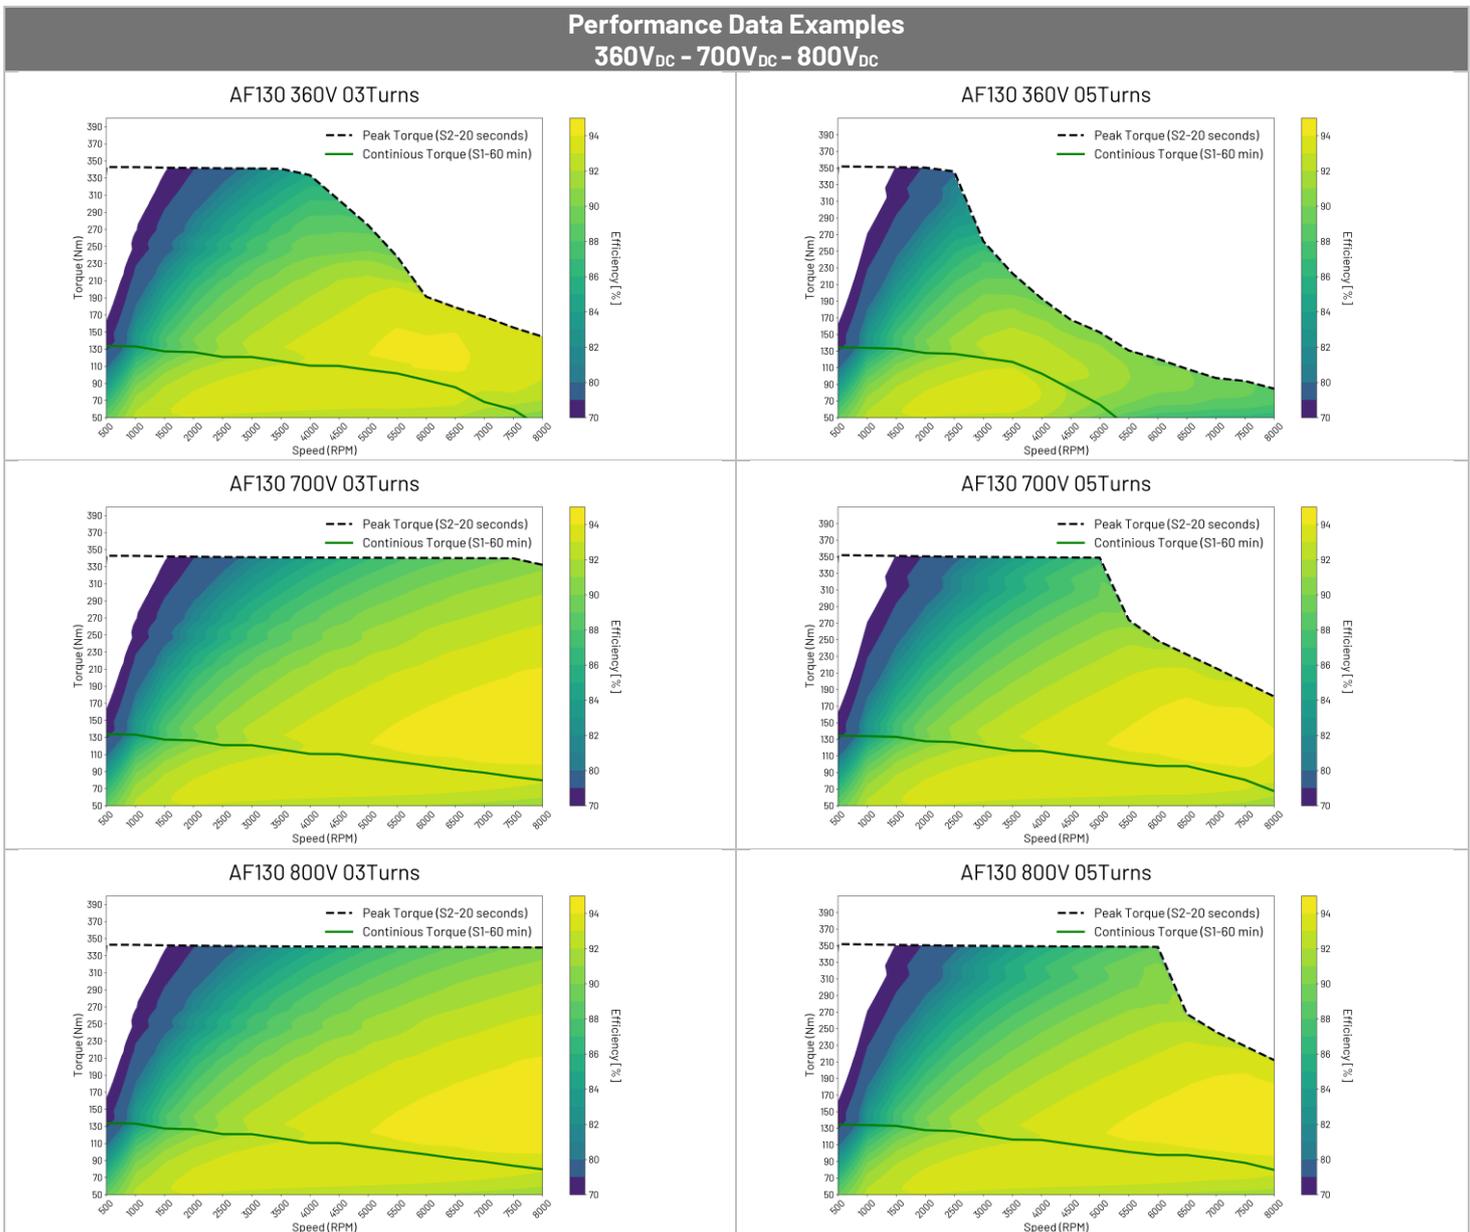

All values in the graphs are quoted for 45°C ambient with coolant at 55°C inlet temperature and 8 LPM flow rate. Efficiency will vary based on Voltages and Turn count.

Graph data is indicative of machine performance, performance may vary based on application and installation. Don't hesitate to get in touch with us for further information.

For more information on this product or Turntide's range of inverters, motors, batteries, pumps and fans, please visit our website or contact our team of experts at electrificationsales@turntide.com.