


DATASHEET



Lightweight e-Fan (48V, 15")

Features

- Long life, brushless, sensor-less motor
- Environmentally sealed (IP67)
- Fully reversible
- Advanced integrated motor controller
- Best in class performance
- Thermal overload protection
- Voltage transient protection
- CAN controllable and diagnostics

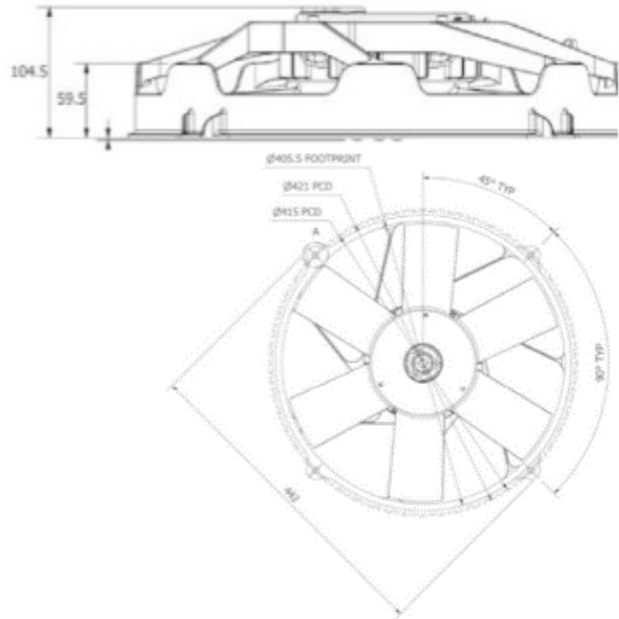


Specifications

Characteristics			
Operational Voltage Range	36V to 52V	Weight (kg)	4.0
Operational Temperature Range	-30°C to +75°C	Storage Temperature Range	-40°C to +85°C
Best Efficiency Point	3764 m ³ /h @ 4350RPM	Max Input Power	approximately 600W

Connector Pin-Out

Connector Information – 12052200⁽¹⁾⁽²⁾
Male 7 way Delphi 150/480 Sealed Connector




Pin	Description
A	CAN LO
B	CAN HI
C	Enable (Ignition)
D	PWM Input
E	Battery (Positive)
F	Address In
G	Ground (Return)

(1). Represent the connector on the fan
(2). Mating harness part number – 12059472. Pin description same as above


Applications

Applications	<ul style="list-style-type: none"> • Main engine cooling • Secondary cooling • Transmission cooling • ERG cooling 	<ul style="list-style-type: none"> • Oil cooling • Hydraulic cooling • HVAC cooling • Electronic cooling • CAC/Intercooler cooling
---------------------	---	---

380mm Lightweight Pull Fan Static Pressure Rise

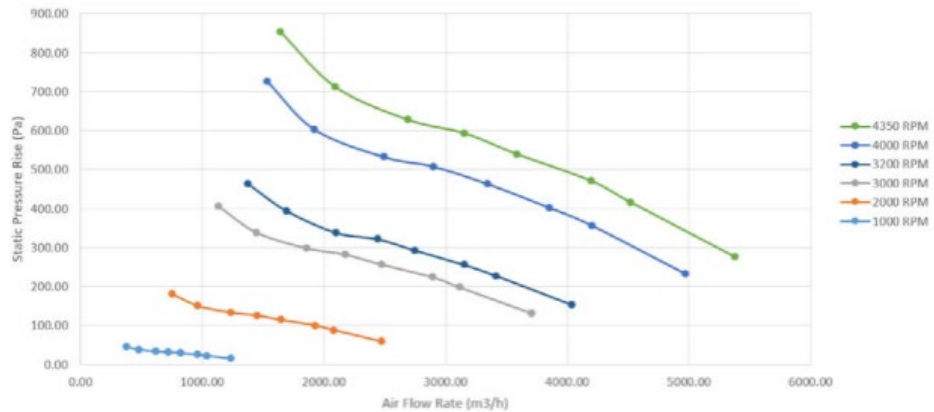

380mm Lightweight Pull Fan Input Power

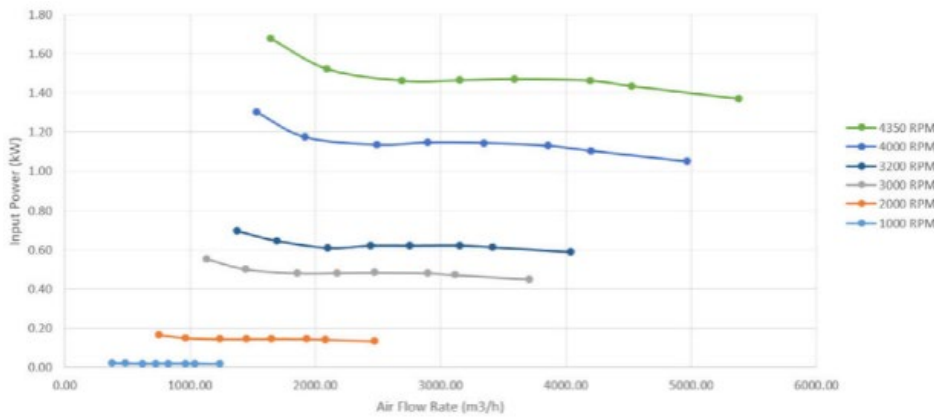

For further information please contact our team of experts at electrificationsales@turntide.com

TURNTIDE TECHNOLOGIES

Our breakthrough technologies accelerate electrification and sustainable operations for energy-intensive industries

Turntide Technologies | 1295 Forgewood Avenue, Sunnyvale, CA 94089

turntide.com | electrificationsales@turntide.com

